


NEWS



Rapid information for our customer.

Drag Shoes and Drag Shoe Supports: Tough and hard!

Schneider steel drag shoes have been tried and tested for decades and are certified according to DIN 76051. They usually offer a **higher load-bearing capacity** than untested standard skids and are the first choice **for heavy-duty use and rough floor surfaces**.

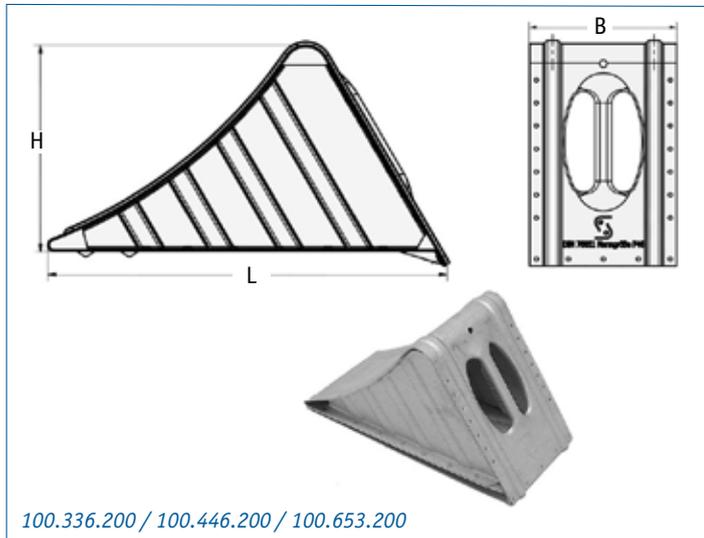


Steel is less susceptible to cracks or wear and tear than plastic and is therefore **much more durable**. Especially on uneven terrain, the higher weight keeps the **hot-dip galvanized shoes** stable on the surface. They are also resistant to chemicals and oils.

We offer various drag shoe supports to ensure that you have the brake shoes **quickly to hand when required**. These can either be screwed or clamped to the vehicle frame.



The supports with different internal widths for the various drag shoe sizes are also protected against corrosion by hot-dip galvanising.

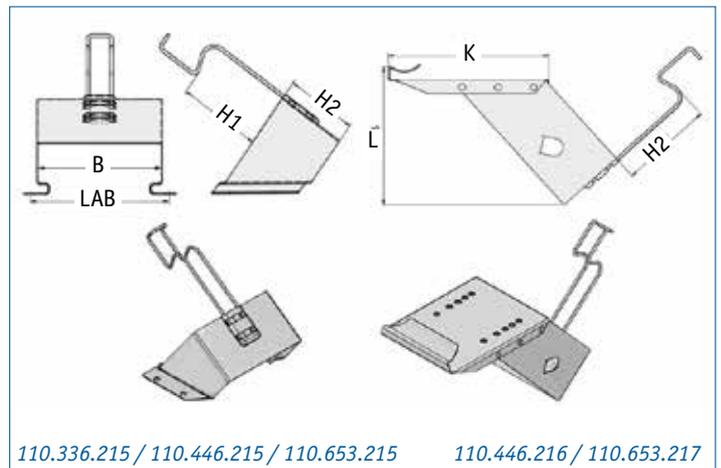

Art.-No.	Product	B	Radius	Wheel load	Weight
100.336.200	Drag Shoe G36	120 mm	360 mm	1.600 kg	1,0 kg
100.446.200	Drag Shoe G46	160 mm	460 mm	5.000 kg	2,8 kg
100.653.200	Drag Shoe G53	200 mm	560 mm	6.500 kg	4,3 kg
110.336.215	Support to screw on	124 mm			0,5 kg
110.446.215	Support to screw on	164 mm		0,8 kg	
110.653.215	Support to screw on	204 mm		1,3 kg	
110.446.216	Support clampable	167 mm		2,3 kg	
110.653.217	Support clampable	207 mm		2,7 kg	